


Faster Heavy Duty Hi Flow BSP Flat Face Quick Release Coupling
For Heavy Construction, Oil Industry and Earth Moving Applications


- Connection system: Screw-on
- Disconnection system: Screw-off
- Connectivity: Both Male and Female couplings under residual pressure
- Disconnection under pressure: Allowed
- Shut-off system: Flat valve
- Interchangeable: According to Faster internal standard
- Screw-on latching system by hexagonal sleeve
- Male couplings with double valve
- FPQ Faster Premier Quality surface treatment
- Automatic slider for threads protection
- Double threaded



FEMALE THREAD	BASE	FLOW RATE	MAX WORKING PRESSURE	MALE PART NUMBER	FEMALE PART NUMBER
1/2" BSP	08	72 lpm	300 bar	3FFV12GASM	3FFV12GASF
3/4" BSP	12	150 lpm	300 bar	3FFV34GASM	3FFV34GASF
1" BSP	16	190 lpm	400 bar	3FFV1GASM	3FFV1GASF



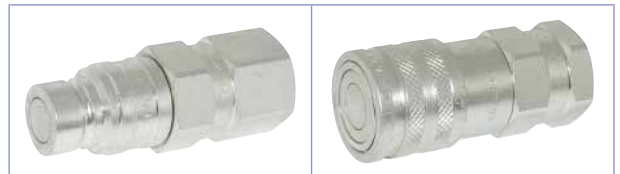


Faster Flat Face Couplings to suit JCB



FEMALE THREAD	BASE		FLOW RATE	MAX WORKING PRESSURE	MALE PART NUMBER	FEMALE PART NUMBER	
1 1/16" UNF	08	M F	25mm	100 lpm	250 bar	2FFI1234SAEM	2FFI1234SAEF
1 5/16" UNF	12		30mm	160 lpm	270 bar	2FFI341SAEM	2FFI341SAEF

Faster Flat Face Couplings to suit Bobcat, Case, CAT, Takeuchi



DESCRIPTION	PART NUMBER
Complete special manifold to suit skid steers	4BD4FI121234C
 1/2" Male repair kit (OLD type)	KIT4FI12M
 1/2" Male repair kit (NEW type)	KIT4FH08M
 3/8" Male repair kit	KIT4BDFFN38
 1/2" Female repair kit (OLD type)	KIT4FI12F
 1/2" Female repair kit (NEW type)	KIT4FH08F

Faster Flat Face Bulkhead Couplings



FEMALE THREAD	BASE		FLOW RATE	MAX WORKING PRESSURE	MALE PART NUMBER	
7/8" UNF	08	M F	25mm	100 lpm	250 bar	2FFI121458SM